


/Material:

/Features:

1. (120 to 150 )
2. ( 500kHz ) / Used at Middle Frequency(Less than 500kHz)
3. Bs(140 Bs 360mT) / High Bs at High Temperature(Above 360mT at 140 )
4. / Low Core Loss at High Temperature
5. 140 / The Minimum Core Loss is Around 140

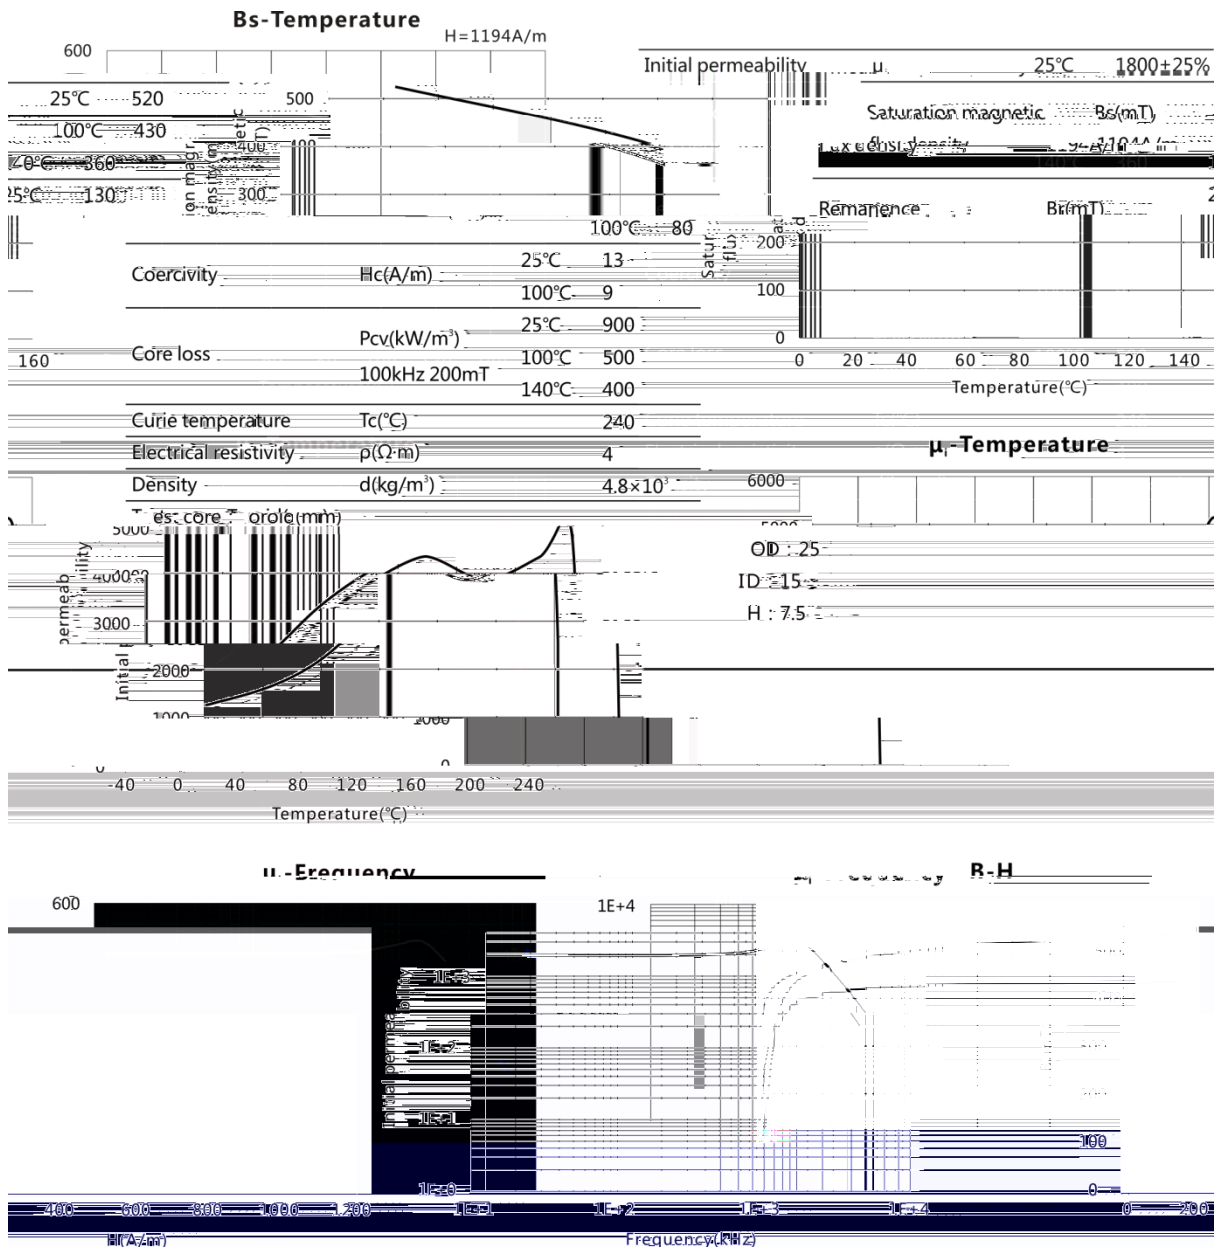

/Material:

